


# FLANGE SPREADERS

One-Size-Fits-All

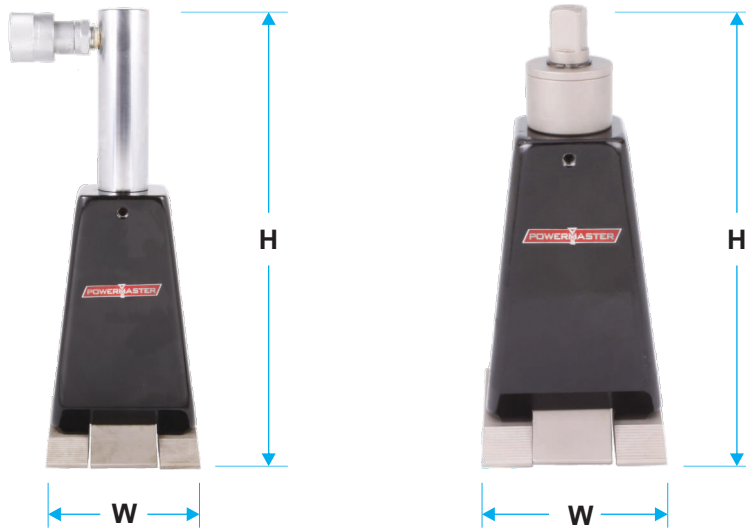

▲  
HS10K Hydraulic Model

▲  
MS10K Manual Model

## Choose Manual or Hydraulic

- Jaws open parallel.
- No drift. It stays where you place it.
- Easy one person operation.
- Universal. One-Size-Fits-All.
- 4535 Kg (10,000 lbs) applied force at tips.

With the Hydraulic Power-Spreader, **HS10K**, a hydraulic cylinder replaces the ratchet handle. A standard hand pump powers 1 Power-Spreader, or a pair, with ease. Again, you are supplied with 4535 kg (10,000 lbs) of force and 76.2 mm (3") of gap; ample for gasket replacement or turning of blinds. Using the manual Power-Spreader, **MS10K**, simply place the tips between the flange faces and turn the ratcheted handle. The ratcheting action is transformed into 4535 Kg (10,000 lbs.) of spreading force and creates up to 76.2 mm (3") of gap.

Model No.	Type	H	W	Access Gap	Stroke	Weight
		mm	mm	mm	inch	kg
HS-10K	Hydraulic	249	116	2.3	3	7.50
MS-10K	Manual	287	116	2.3	3	7.20