


SF-6072

TUBE / PIPE BEVELLING AND CUTTING SPLIT FRAME MACHINE


Light and Portable Flange/Pipe Beveling and Cutting Split Frame Machine

Locking Range **1524mm OD to 1829mm OD (60" - 72")**

Externally mounted SF-6072 is a split frame, clamshell type light and portable design. A rugged and slim machine suitable for tubes and pipes in the size range of 1524 mm to 1829 mm in external diameter. It is a new generation heavy duty facing, beveling and cutting machine designed for the Piping industry.

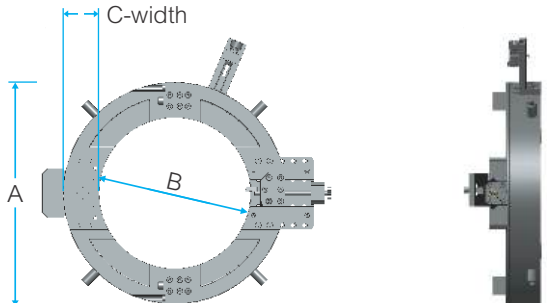

	Pneumatic (mm)	Electric (mm)	Hydraulic (mm)
A	2054.9	2054.9	2054.9
B	1866.9	1866.9	1866.9
C	188.0	188.0	188.0

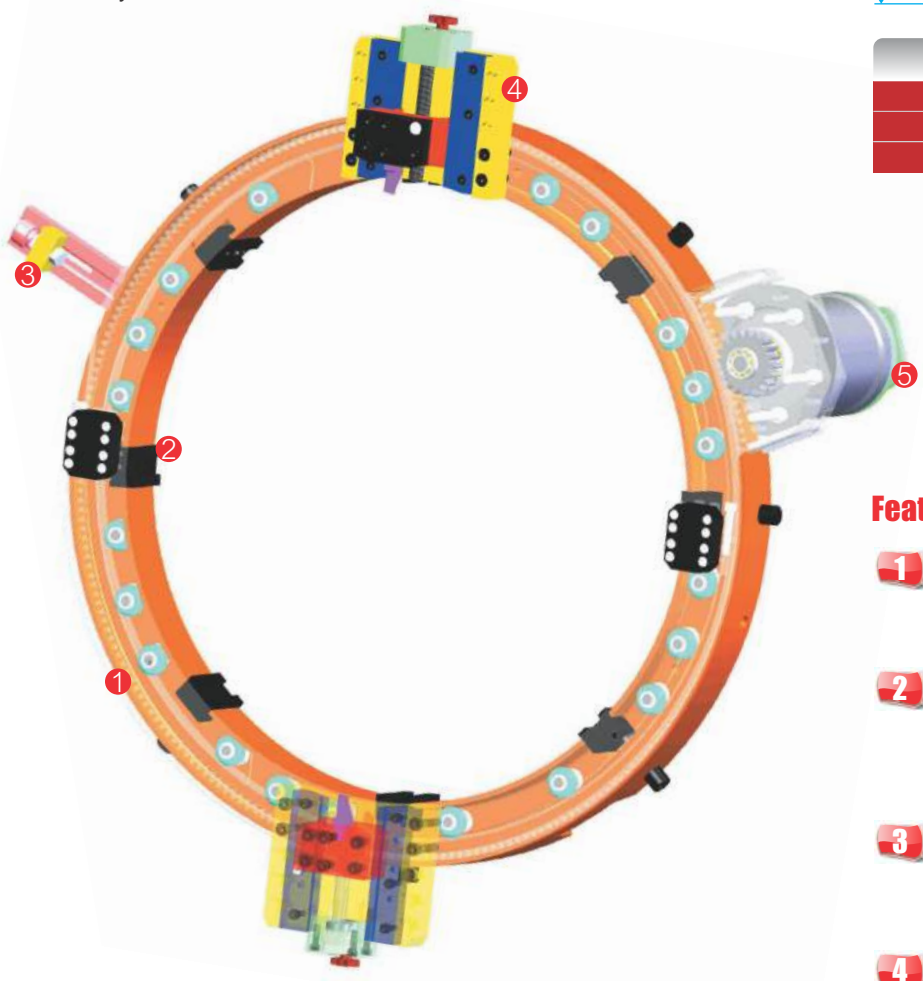


Features

- 1 SPLIT FRAME MACHINE** - It consists of a split mobile ring and fixed ring. Light weight, slim design.
- 2 JAWS** - Wedge style hardened tool steel jaws for maximum life and secure positioning. 8 points of contact locking system. It provides stability and avoids vibration.
- 3 TRIP ASSEMBLY** - It gives an auto feed to the tool bit assembly. Trip can be engaged or disengaged depending on feed required.
- 4 TOOL SLIDE** - Holds the cutting tool bit assembly tightly at the desired position for the cutting and beveling operation. Its robust construction and support to the cutting bits ensures vibration free performance.
- 5 PNEUMATIC OR HYDRAULIC DRIVE** - High quality pneumatic or hydraulic drive for reliable service and long working life.

Technical Specification

Drive		Pneumatic	Electric	Hydraulic
Locking Range	mm	1524 - 1829	1524 - 1829	1524 - 1829
	(inch)	(60" - 72")	(60" - 72")	(60" - 72")
Idle Speed	rpm	4	4	4

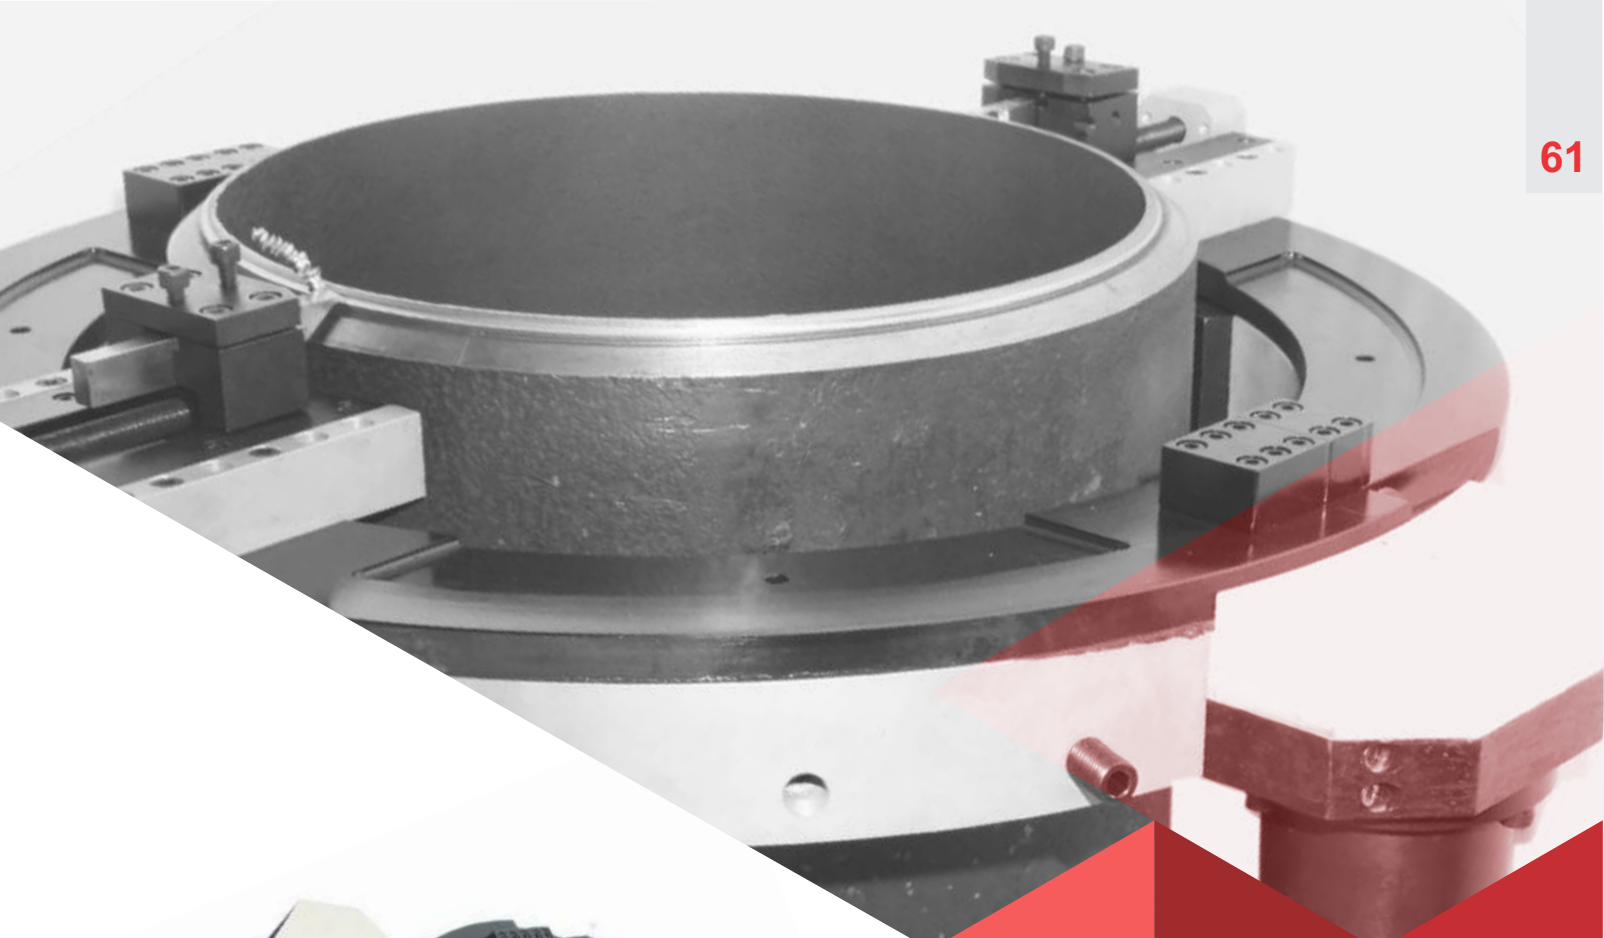

Hydraulic

▼ SF-6072 serves a purpose in the piping sector.



Recommended for :
Tube Beveling, Cutting, Facing, Counterboring